



Off Your Floor & Out the Door: Guidelines for Safe Use of Pallets for Drums.



DRUM TRANSPORTATION

To insure the safe transportation of drums, Nexeo Solutions requires the following:

- All pallets should be visually inspected to assure they are in good repair and have no structural damage.
- Drums should be placed on 48" x 48" pallets whenever possible. (Fig A)
- If a 40" pallet is used, the drums must also be banded or shrink wrapped (Fig B) to the pallet to insure that the drums won't fall when the pallet is moved.
- No more than three overpack drums on a pallet, and must be banded or shrink wrapped.
- At no time may a plank over end type pallet be used (Fig C2). All pallets must be closed end type (Fig C1).

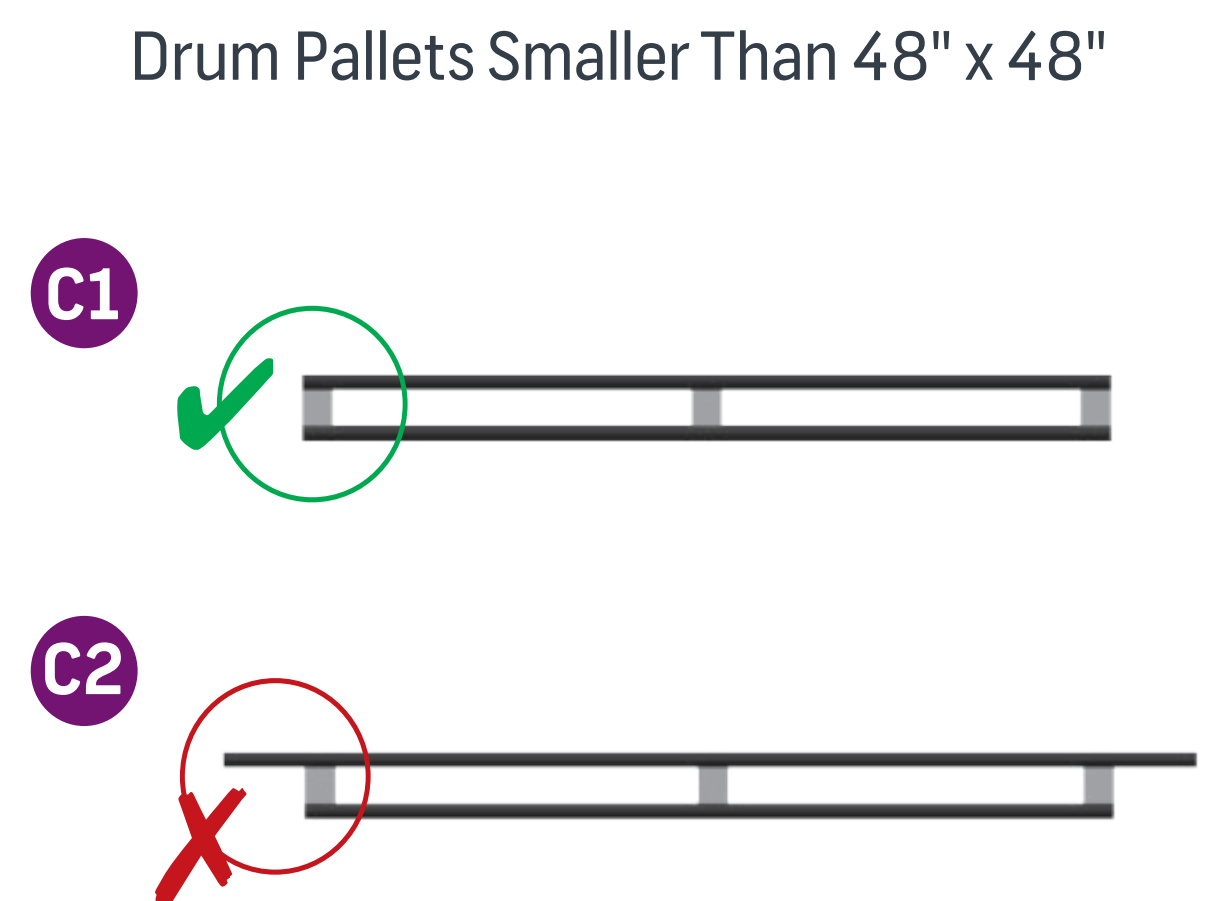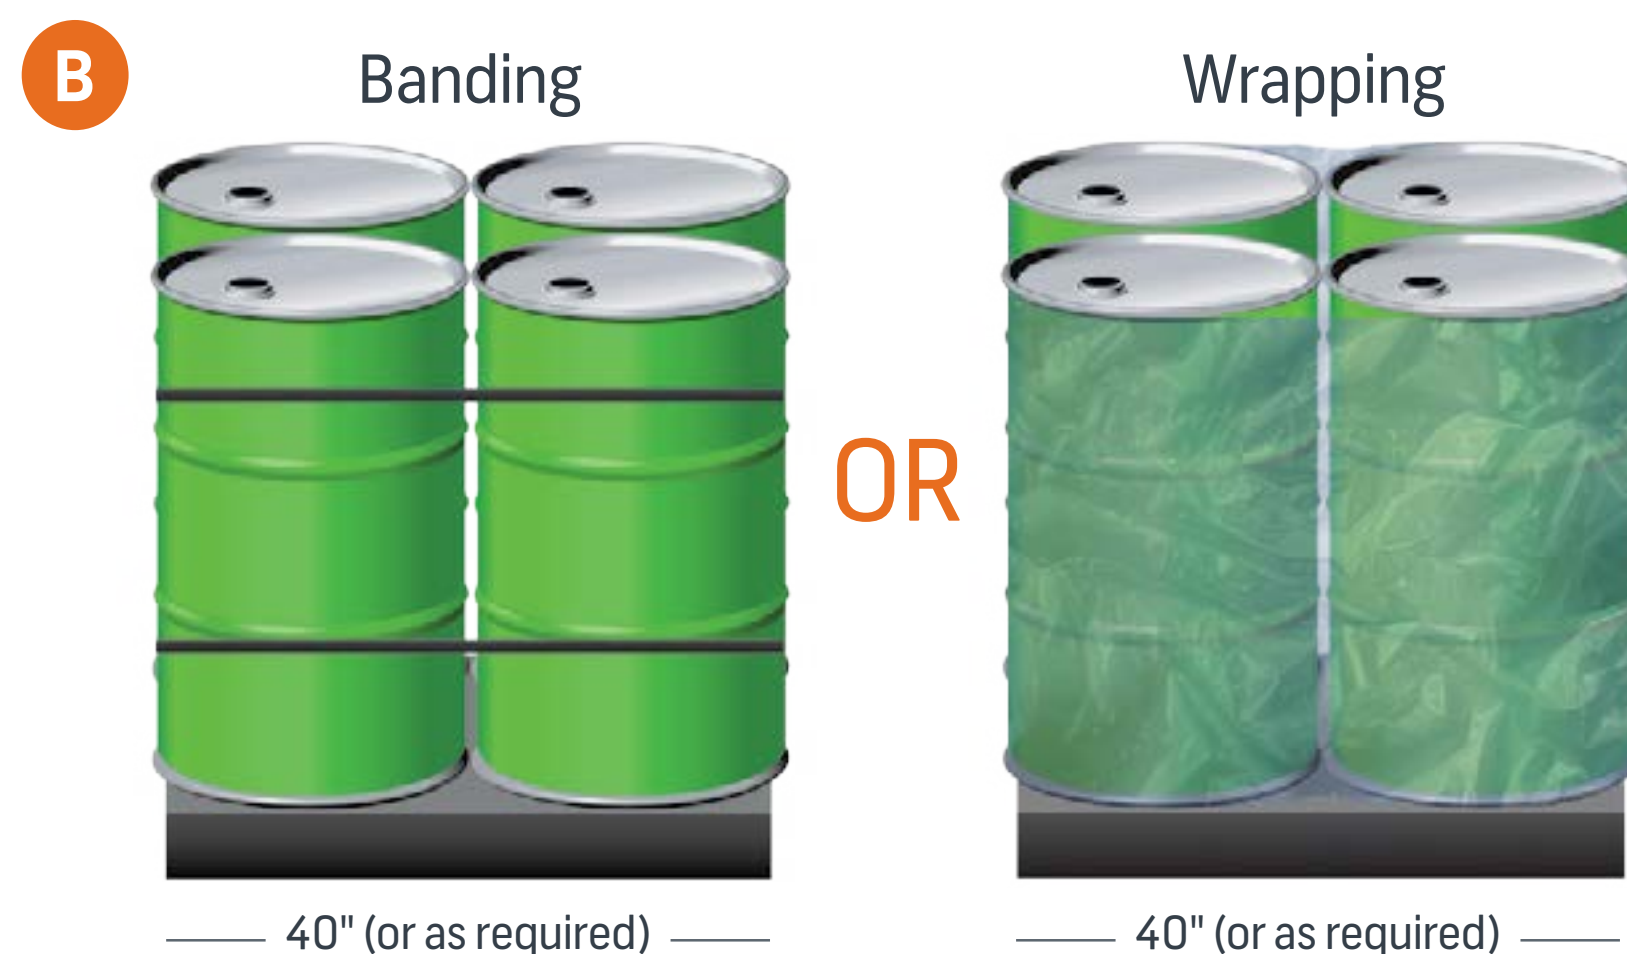

PLEASE POST

Drum safety transportation
starts with YOU!

nexeo[®]
solutions